

COMPACT WA



Automatic labelling systems
for cylindrical products.



COMPACT WA is particularly suitable for application onto jars, flacons, bottles and cans.

- Max. speed: **3600 p/hour**
- Max. label width: **140 mm**
- Approx dimensions: **1650 x 1200 x 1400 mm**


EN

STANDARD FEATURES


LABELX JR 140 EW
Start photocell
Conveying module with flat belt
Wrap around device
COMPACT main frame
Horizontal and vertical microregulation unit



Hot foil coding unit

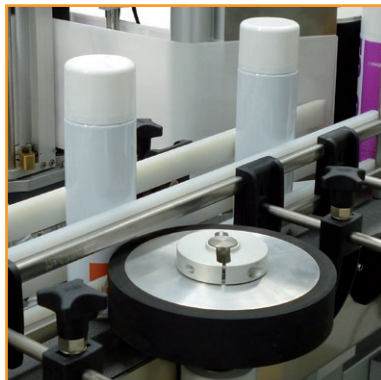

Spacer by motorized wheel

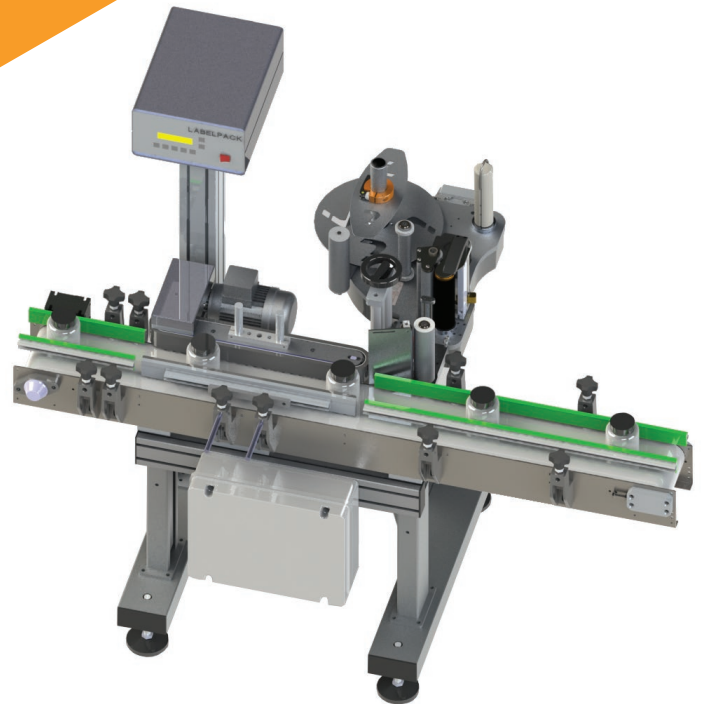

APPLICATIONS AREAS



OPTIONAL ACCESSORIES

LABELX JR 250 EW
Product separator device
Hot foil and Thermal Transfer coding unit
Encoder for speed synchronisation
Pre-end of labels roll alarm
Stainless steel COMPACT structure
Sign lamp alarm